SCHEMATIC DIAGRAM

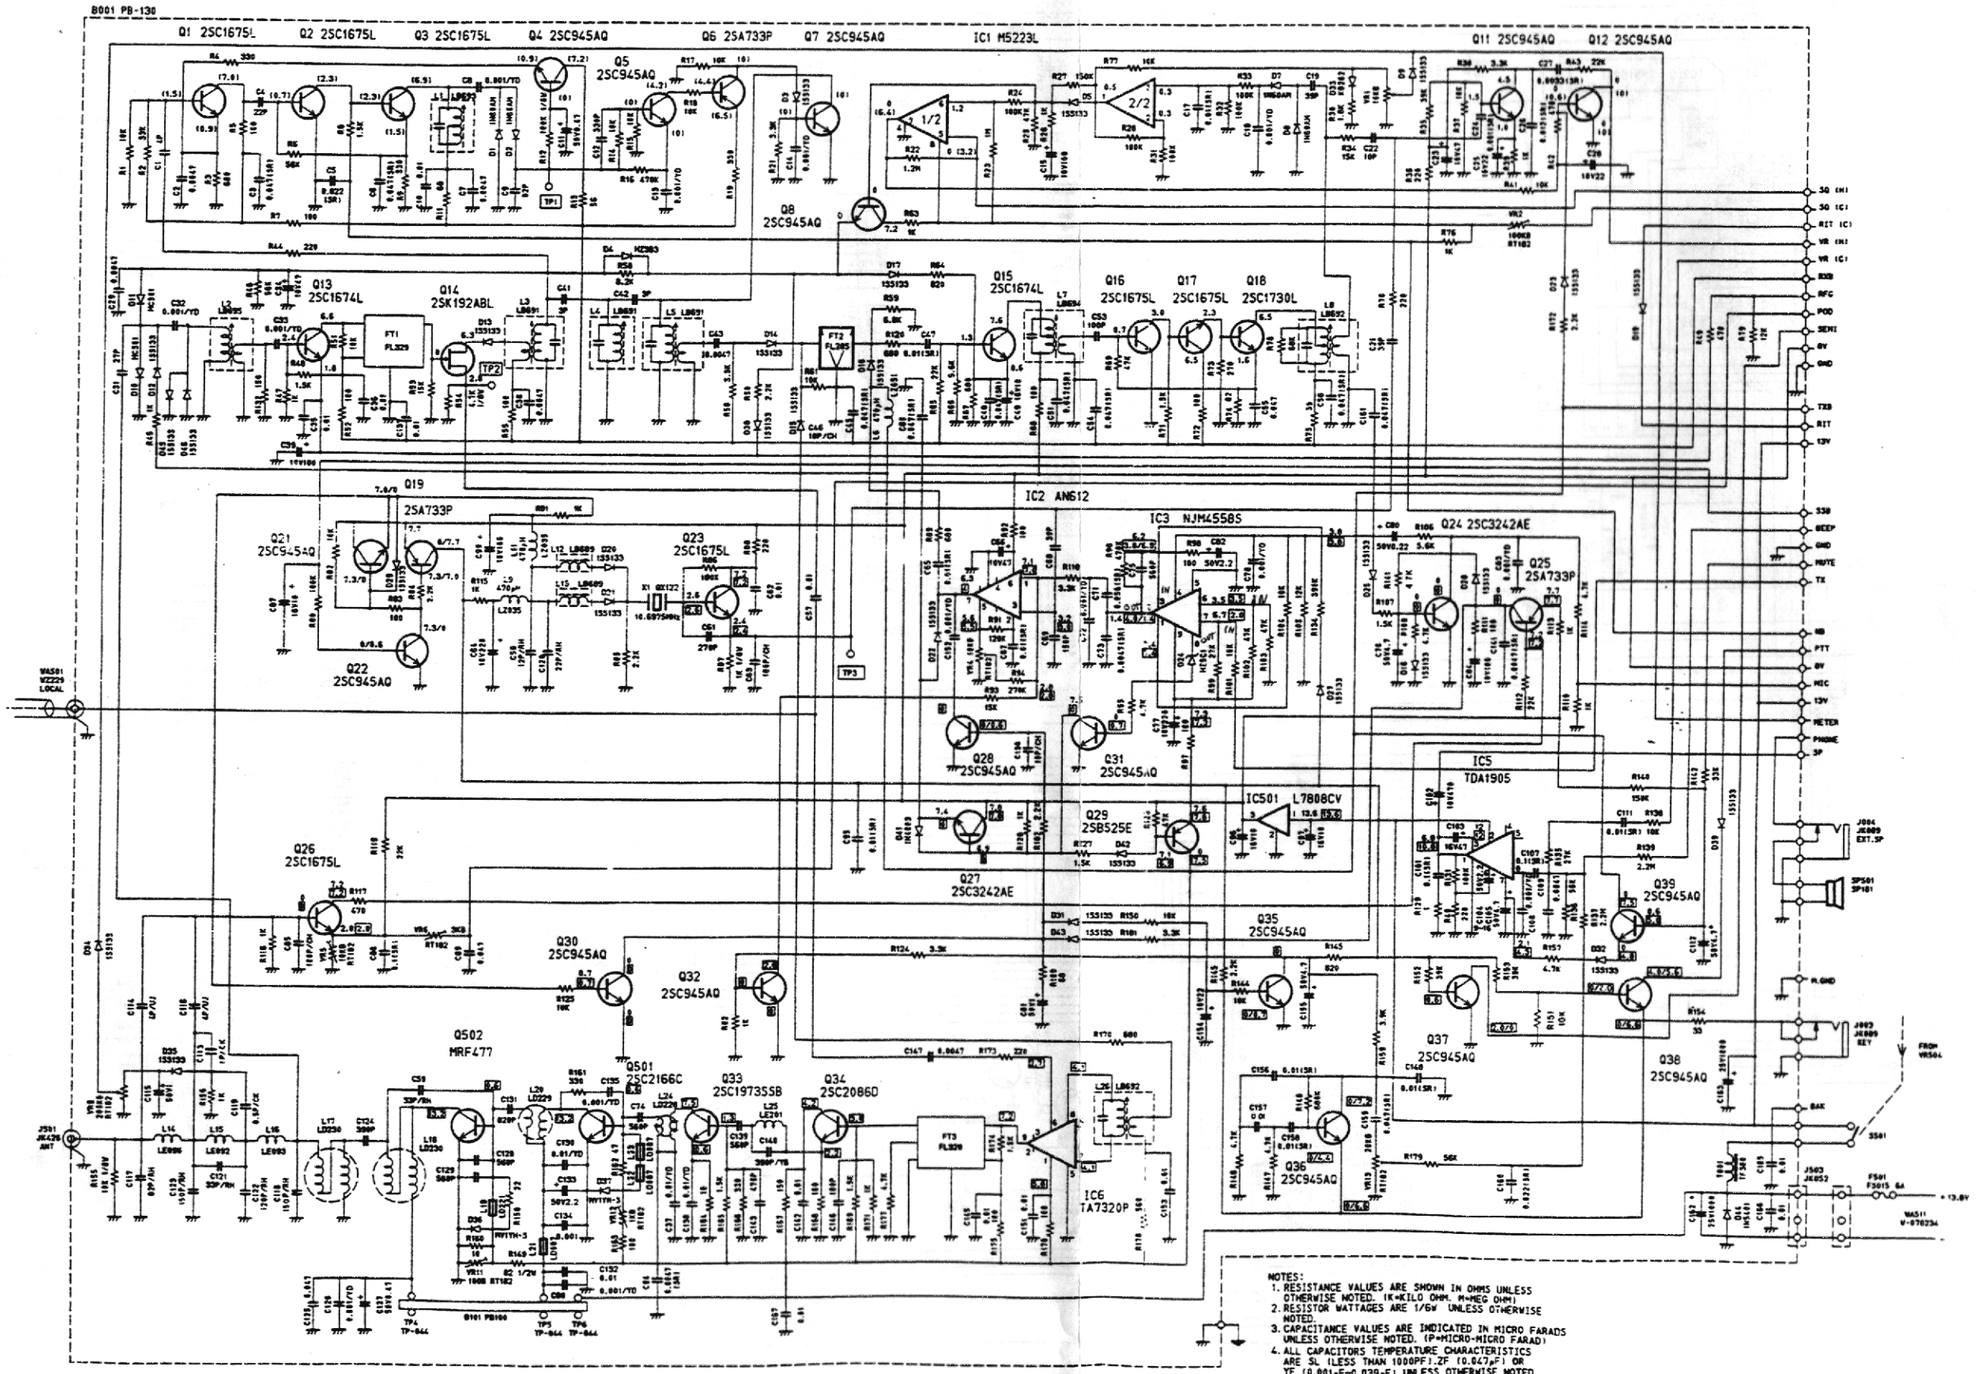

NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED. (K=KILO OHM, M=MEG OHM)
2. RESISTOR WATTAGES ARE 1/6W UNLESS OTHERWISE NOTED.
3. CAPACITANCE VALUES ARE INDICATED IN MICRO FARADS UNLESS OTHERWISE NOTED. (P=MICRO-MICRO FARAD)
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SL (LESS THAN 1000PF):ZF (0.047μF) OR YF (0.001μF~0.039μF) UNLESS OTHERWISE NOTED.
5. DC VOLTAGE IN ▭ SHOWS TX CONDITION.(SSB/CW)
6. DC VOLTAGE IN NO MARK SHOWS RX CONDITION.(SSB/CW)
7. DC VOLTAGE IN ( ) SHOWS RX CONDITION UNDER OPERATION OF EACH FANCTION.